

A rapid classification of wheat flour protein content using artificial neural network model based on bioelectrical properties

Sucipto Sucipto^{*1}, Maffudhotul Anna², Muhammad Arwani³, Yusuf Hendrawan⁴

^{1,2,3}Department of Agroindustrial Technology, Agricultural Technology Faculty, Universitas Brawijaya, Indonesia

¹Halal and Qualified Industry Development (HAL-Q ID), Universitas Brawijaya, Indonesia

⁴Department of Agricultural Engineering, Agricultural Technology Faculty, Universitas Brawijaya, Indonesia

*Corresponding author, e-mail: ciptotip@ub.ac.id

Abstract

A conventional technique of protein analysis is laborious and costly. One rapid method used to estimate protein content is near infrared spectroscopy (NIRS), but the cost is relatively expensive. Therefore, it is necessary to find a cheaper alternative measurement such as measuring the bioelectrical properties. This preliminary study is a new rapid method for classified modeling of wheat flour protein content based on the bioelectrical properties. A backpropagation artificial neural network (ANN) was developed to classify the protein content of wheat flour. ANN input were bioelectrical properties, namely capacitance, and resistance and output was a type of the flour, namely hard, medium and soft flour. The result showed that the ANN model could classify the various type of flour. The best ANN model produces a mean square error (MSE) and regression correlation (R) of 0.0399 and 0.9774 respectively. This ANN model could classify the protein content of wheat flour based on the bioelectrical properties and have the potential to be used as a basic instrument to estimate the protein content.

Keywords: artificial neural network, capacitance, protein, resistance, wheat flour

Copyright © 2019 Universitas Ahmad Dahlan. All rights reserved.

1. Introduction

Protein is often used as the basis for the wheat flour classification. Wheat flour consists of starch, water, protein is 70 to 75%, 12 to 14%, 8 to 16% respectively, also fat and ash are 2% and 1% respectively [1]. Gluten is the main wheat flour protein consisted of gliadin (20 to 25%) and glutenin (35 to 40%). Based on the protein content, wheat flour is divided into three groups, namely hard flour (minimum protein of 12%), medium flour (minimum protein of 10 to 11%), and soft flour (minimum protein of 8 to 9%). The selection of wheat flour for foodstuffs is adjusted to its protein content. Wheat flour with a high protein contains much gluten that will determine the texture and elasticity of food products. Gliadin and glutenin give a quite large effect on the stability and dough development time [2].

On the production of wheat flour, the rapid measurement of protein content and other chemical components is very important. The conventional technique is difficult to implement because it is laborious. Some protein testing methods have been developed, such as the methods of Kjeldal, Bradford, Dumas (Nitrogen Combustion), Biuret, Lowry [3, 4], dye binding, and formol titration. Those tests take a long time, relatively expensive, need complex sample preparation, and also need chemical and laboratory expertise. One new method for predicting the quality of wheat flour is near NIRS [5], but this method is still relatively expensive.

Recently, a rapid measurement which is relatively cheap is urgently required. One alternative is dielectric spectroscopy based on bioelectrical properties of a material. Bioelectric is the electrical properties of cells or living tissue affected by metabolism compounds and ion exchange inside. Bioelectrical properties have been used to determine the quality of foodstuffs, for example, sugarcane [6-8], palm civet coffee [9], Garut citrus fruits [10], chickpea flour [11], legume flour [12], beef tallow, lard and palm oil [13, 14]. The advantages of a dielectric method with parallel plates are cheap, simple, fast and practical. This method is used to determine the quality and purity of materials quickly and practically.

The core development of the instrument is a model that was used to convert the main input became an output as fast as possible. A backpropagation ANN is one of the mathematical models that can learn input and output through iterations without any previous knowledge in the shortest time. The structure is relatively simple with connections among neurons [15]. Each neuron is processing elements that perform the converting function of input to output. ANN model has been widely used to predict the quality of ingredients and food products, including, to determine the level of eggs freshness [16], and predict wheat quality parameters [5]. The aim of this study was to develop a model that can classify the protein content of wheat flour based on the bioelectrical properties.

2. Research Method

2.1. Sample Preparation

Six different brands of wheat flour divided into three class and given symbols of A, B (Hard Flour); C, D (Medium Flour); and E, F (Soft Flour). The hard flour class consisted wheat flour which had a minimum protein content of 12%, medium flour with a protein content of 10 to 11%, and soft flour with a protein content of 8 to 9% [17]. The samples were obtained from some produced in East Java Indonesia.

2.2. Bioelectrical Properties Measurement

A Parallel plate capacitance sensor was made from a copper plate with the dimensions of 0.5x1x2cm. The samples were put in the parallel plate and connected with LCR meter (BK Precision 879B) to measure the bioelectrical properties and saved those data to the computer. Three types of bioelectrical properties were measured, namely inductance, capacitance and resistance at a frequency of 100, 120, 1000 and 10000 Hz. The bioelectrical properties were measured by two factors, the first factor is flour brand with six types of flour and symbolized by A, B, C, D, E and F. The second factor is the temperature of measurement with three levels (25, 30, 35°C) that is repeated three times. Bioelectrical properties of each wheat flour sample were measured seven times per frequency in one temperature. Therefore, the total datasets for six type of wheat flour are 1512 datasets.

2.3. Datasets Preparation

Prior to modeling in ANN, there is preparation the datasets to obtain an appropriate input in three steps namely; selection, preprocessing, and transformation data. From the measurement data of three bioelectrical properties there is a huge number of data, therefore selecting data is one of the most important steps in the preparation of datasets. Preprocessing data such as cleaning and smoothing also used to remove the instances data. A preprocessing algorithm was used to scaling the datasets. Then, the selected data was transformed using the normalization algorithm and become the input of ANN modeling.

2.4. Design of ANN Topology

ANN topology was developed using Matlab R2012a with bioelectrical properties input (L, C or R) and output (hard flour (1 0 0), medium flour (0 1 0), soft flour (0 0 1)). A Backpropagation ANN was commonly used in agricultural-based industry [18]. The ANN topology design was performed in 2 stages: training and validation. The model training stage was conducted by trial and error from the activation function, learning function, the number of hidden layers and node per hidden layer as well as the number of epochs. Trial and error of ANN topology modification can be seen in Table 1. The modification aimed to produce the best ANN topology with the lowest validation mean square error (MSE) and the highest validation correlation coefficient (R). MSE and R formula can be seen in (1) and (2) [19].

$$R = \sqrt{1 - \left[\sum_1^N \left(\frac{Q_{exp} - Q_{cal}}{Q_{exp^2}} \right)^2 \right]} \quad (1)$$

$$MSE = \left[\sum_1^N \left(\frac{Q_{exp} - Q_{cal}}{n} \right)^2 \right] \quad (2)$$

where:

Q_{exp} = Measurement value

Q_{cal} = Prediction value

N = Measurement number of dataset

Table 1. Modification of ANN

Activation Function		Training Function	Node in hidden layer	Hidden layer	Epoch
Hidden layer	Output layer				
Tansig	Purelin	Trainlm	10	1	1000
	Tansig	Traingd	15	2	5000
	Logsig	Traingd	20		
Logsig	Purelin	Traingda	30		
	Tansig	Traincgb	40		
	Logsig	Trainscg	50		
		Trainbfg	20 10		
		Traindx	20 20		
		Trainb	20 30		
		Trainbr	20 40		
		Trainoss	20 50		
		Traincgb			
		Traincgf			
		Traincgp			
		Trainrp			

3. Results and Analysis

3.1. Preprocessing Data

As shown in Figure 1, the bioelectrical properties at a frequency of 10 kHz are biased. On the other hand, the result from preprocessing data was shown only two types of bioelectrical properties (capacitance and resistance) produce a higher coefficient correlation than all three types of bioelectrical properties. Therefore, in further discussion, both capacitance and resistance in the frequencies of 100, 120, and 1000 Hz were used to develop an ANN model. ANN model was developed only using bioelectrical properties that were obtained from the measurement at 30°C because it is approached the production of wheat flour at room temperature about 30°C.

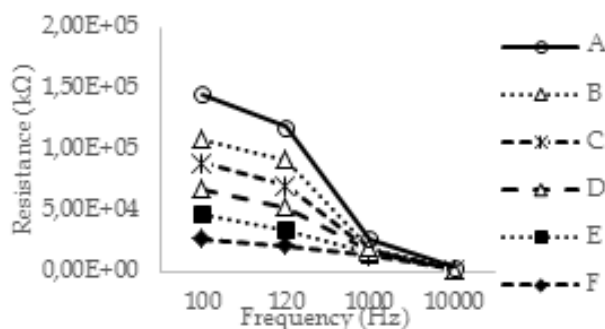


Figure 1. Resistance of wheat flour in various frequencies within six brands of wheat flour; A and B for Hard flour, C and D for medium flour, E and F for soft flour

3.2. Effects of Frequency and Temperature on Capacitance

Effects of temperature and frequency on bioelectrical properties include capacitance and resistance at frequencies of 100 Hz, 120 Hz, 1000 Hz and temperatures of 25°C, 30°C, 35°C respectively. The mean of 7 bioelectric data measurement of each frequency on each wheat flours was depicted in Figure 2.

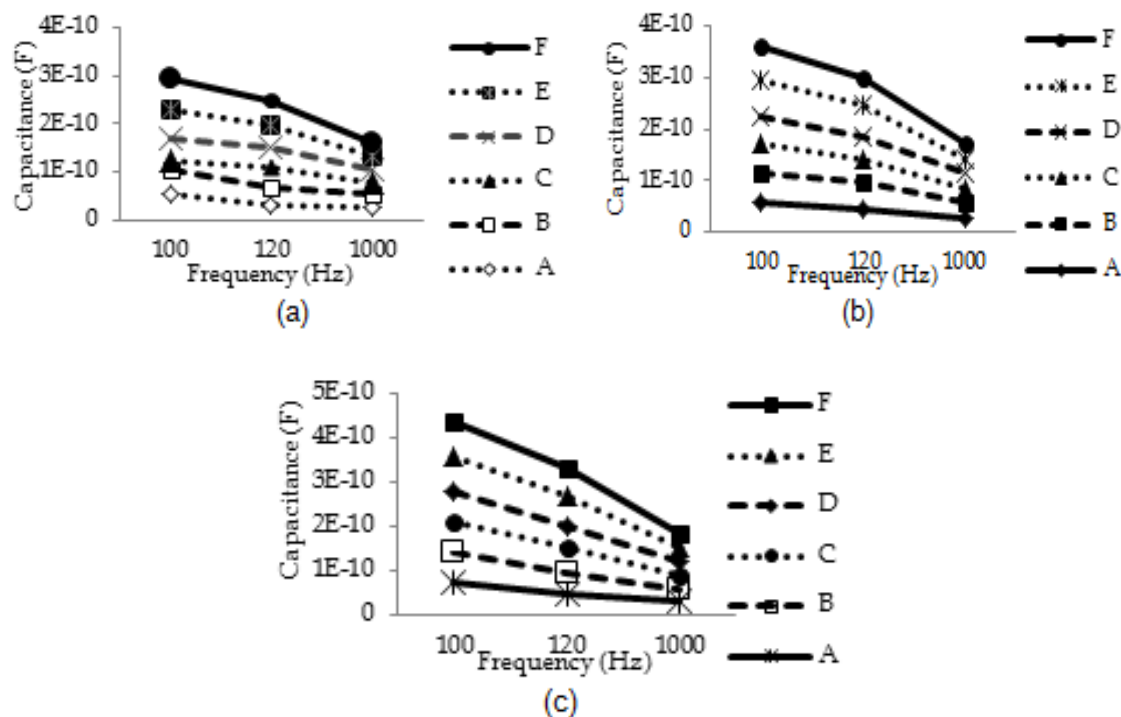


Figure 2. Capacitance of wheat flour in (a) 25°C, (b) 30°C, (c) 35°C in the six types of wheat flour; A and B for hard flour, C and D for medium flour, E and F for soft flour

Capacitance is material ability to store electric charges. Bioelectric properties show the interaction of foodstuff and electric field [20]. Figure 2 show that the higher the frequency, the lower the capacitance value is. Those results are in accordance with Nelson and Trabelsi [21] stating that the higher the frequency, the lower the dielectric constant and capacitance. Higher frequency caused the rapid fluctuation of negative and positive charge in the parallel plate. When the frequency is increased, the electric current moves alternately in rapid motion and this motion affects the amount of capacitor charge. Before the capacitor is fully charged, the electric current is turned around so that the amount of the charge is decreased causing the capacitance value decreased [10]. Furthermore, the bioelectrical properties of wheat flour are influenced by temperature [21]. The dielectric constant decreases with increasing frequency, but increases with increasing of temperature and moisture content [11, 12]. The higher the temperature, the higher the dielectric constant value is [21].

3.3. Effects of Frequency and Temperature on Resistance

Resistance is the material ability to inhibit the flow of electrical charges. Figure 3 shown that the resistance with frequency decreased. In the higher frequency, the electrical charge that fills the capacitor becomes less which reduced the resistance of the electrical charges. Increasing external frequency will increase the speed of change in mobility of electrical charge in the material [10]. Kraft [22] reported that resistance of material was influenced by the length of dimensions, cross-sectional area, type of material and temperature. Therefore, wheat flour belongs to the insulators types cause the resistive properties in various frequency.

On the foodstuffs and agricultural products, especially in wheat flour, the water content is one of the main indicator of quality product, with a maximum of 14% [21]. Water is a very poor conductor and it is a special ion solvent that causes electrical charge flow between capacitor plates. There is no dielectric material which has perfect insulator consequently there is always leakage electrical charge between capacitor plates. Because that, the wheat flour contains water that is a very poor conductor, then its resistance increased with the rise of temperature. At high temperatures, there is high ions mobility resulting in electron collision in the material, consequently inhibits the external electrical charge to penetrate into the material.

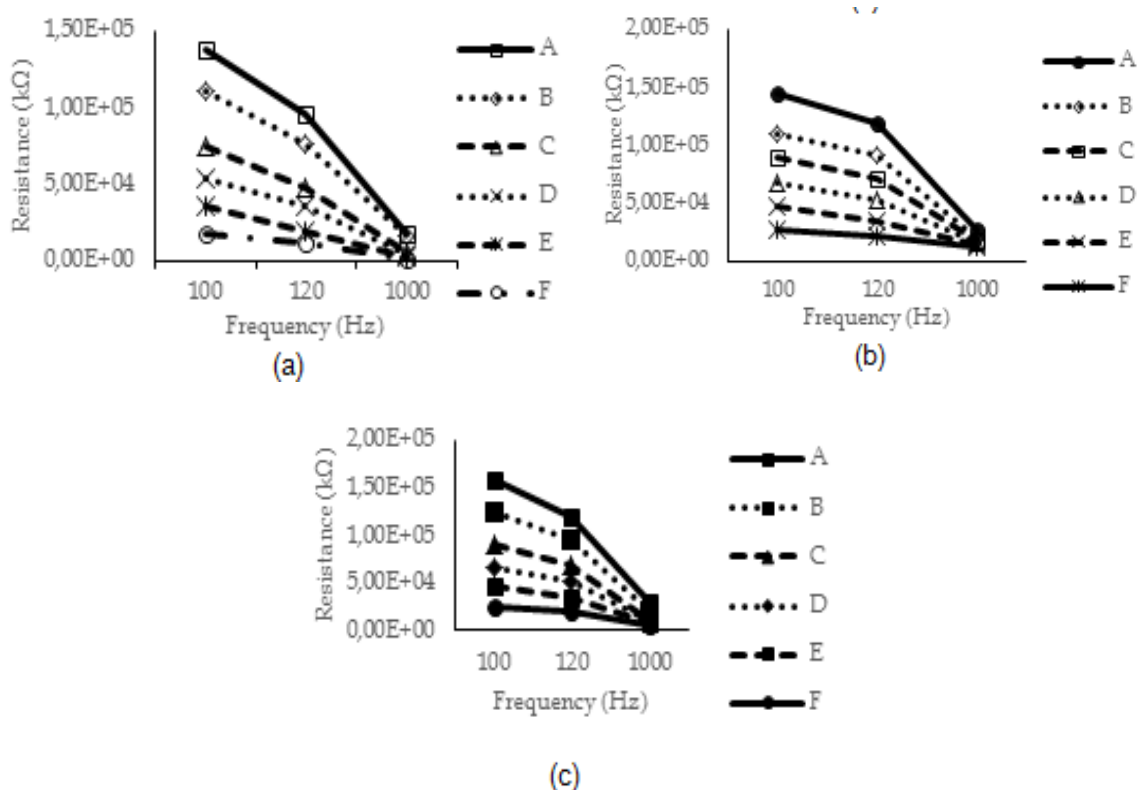


Figure 3. Resistance of wheat flour in (a) 25°C, (b) 30°C and (c) 35°C in the six types of wheat flour; A and B for hard flour, C and D for medium flour, E and F for soft flour

3.4. ANN Modelling

The selection of ANN topology was carried out using trial and error. After preprocessing, the dataset was reduced to 756 bioelectric data and then become the input of ANN model. There is a total of 71.43% (540 data) for training and 28.57% (216 data) for validation. Before ANN modeling, the dataset was transformed using min-max normalization.

The transformed dataset was used to develop an ANN model. The first step was the selection of activation function which is shown that tansig algorithm used in the hidden layer and output layer produces the smallest MSE by 0.1935 and 0.088473 of the correlation coefficient (R). According to Özkan, Kun [23], the activation functions with a nonlinear type such as tansig and logsig are considered as more capable to resolve more complex problems so that the function can be used in the hidden layer. As shown in Table 2.

Table 2. Training Function Variation

Training Function	MSE Validation	R Validation
Trainlm	1.2840	0.15811
Traingdm	0.1935	0.88473
Traingd	0.1939	0.88447
Traingdx	0.1676	0.90106
Traincgb	0.1169	0.9332
Trainscg	0.0939	0.94599
Trainbfg	0.3058	0.79448
Trainb	0.2860	0.82434
Trainbr	0.0582	0.96683

Trainbr learning function produces the lowest MSE of validation by 0.0582 and highest R of validation by 0.96683 compared to other learning function. Trainbr function (Bayesian regularization Backpropagation) is a network training function that updates the values of the

weight and bias in accordance with Lavenberg-Marquardt optimization. This function minimizes squared and weight error combinations, then determine the correct combination to produce the best network.

Table 3 shown that ANN topology which has 20 nodes in the hidden layer 1 and 50 nodes in the hidden layer 2 provides the smallest MSE of validation by 0.0399 and highest R of validation by 0.97743. The best results are obtained using two hidden layers, but the iterations time is too long. According to Zhang, Eddy Patuwu [24], with more layer and nodes per layer, the network can solve more complex problems. However, if the number of nodes less than the complexity of problems then resulted in an underfitting condition which is referred to an ANN that can neither model the training data nor generalizes to new data, otherwise ANN model the training data too well called which are called overfitting.

Table 3. Node and Hidden Layer Variation

Topology	MSE Validation	R Validation
2 40 3	0.1072	0.93878
2 50 3	0.0617	0.96506
2 20 40 3	0.0557	0.96817
2 20 50 3	0.0399	0.97743
2 30 50 3	0.0638	0.96365

The optimal iteration is resulted in variation epoch of 1000 and 5000, obtained the same result as to achieve the lowest MSE and highest R it is reached in 158 iterations. The iteration is stopped if it has reached the specified number of epoch even though the goal has not been achieved. According to Hendrawan and Murase [19], there is no condition of a proper combination of ANN parameters so that the trial and error of network parameters is necessary to produce the smallest MSE.

Figure 4(a) shows that at the beginning of the training, the MSE value is very high and far from the goal. The iteration stops at MSE of 0.0097 showing the goal has been reached. Meanwhile, Figure 4(b) shows the correlation coefficient of the validation stage was 0.9774. Therefore, there was a small error between the predicted and real data in all experiments. The developed network had good generalization in classify the protein content of the wheat flour. According to Elfadl, Reinbrecht [25] when R^2 is $\geq 80\%$ the prediction was quite good.

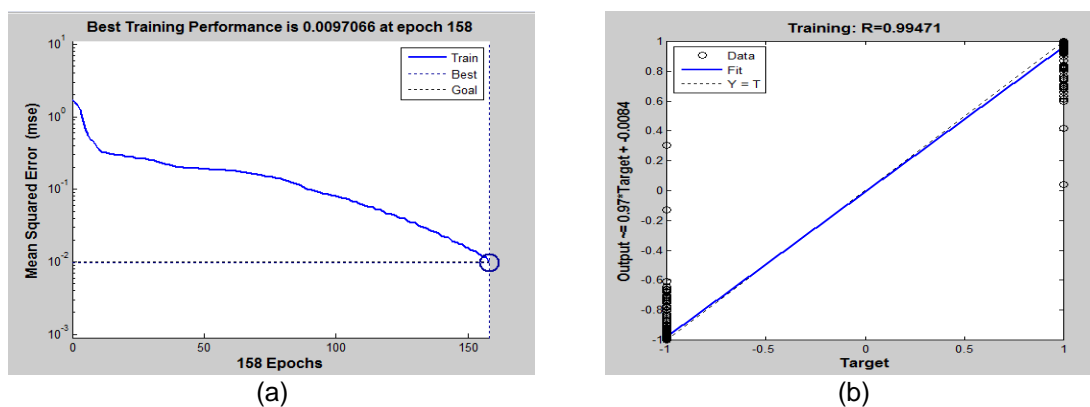


Figure 4. Performance (a) and Regression plot (b) in Training stage

The structure of ANN model can be seen in Figure 5 with the combination of 2–20–50-3 nodes. Two nodes inputs are capacitance and resistance, 20 nodes in the first hidden layer and 50 nodes in the second hidden layer, and also three nodes in the output layer namely hard flour, medium flour, and soft flour. The complexity data for flour classification is more than the model of effective environmental control system [26]. The final model was developed to obtain weights in each node. Weight is key element of ANN model which indicates the relative strength of the

data input or many connections that move data from one layer to another layer. Besides obtaining weight, optimal bias is also generated in the network. Each node receives input signals from other nodes in front of it through the activation function which will generate an output signal. ANN is able to learn from the examples were never known before [24].

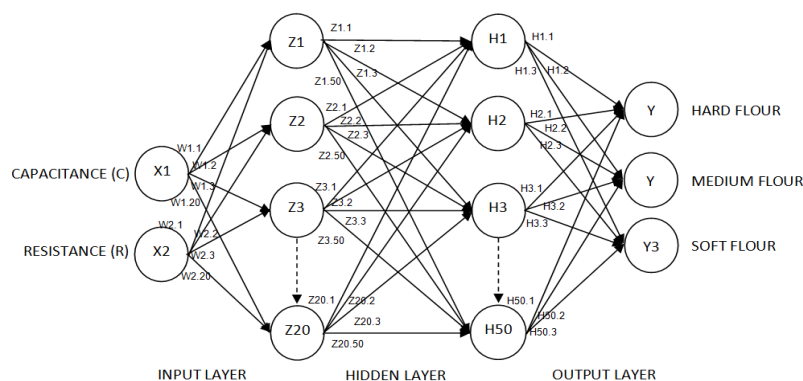


Figure 5. Selected ANN Topology

3.5. Classification of weath flour

Bioelectric properties of materials, especially capacitance and resistance are greatly influenced by chemical content. Therefore, the ANN model for classification of wheat flour based on the protein content is important because it is related to processing factors such as water absorption and gluten strength. That application is beneficial for bakery and another industry to produce quality products with high quality raw material. Classification of wheat flour protein based on bioelectric properties can be developed further and used to determine the wheat flour. It is related to wheat flour labeling which is rapid and affordable costs. The result of this study becomes the preliminary study for the development of a wheat flour rapid classification instrument which is reliable and affordable costs.

4. Conclusion

According to this study carried out the bioelectrical properties (capacitance and resistance) using the ANN model could classify the protein content of wheat flour. The best ANN topology to classify the wheat flour become hard, medium and soft flour of protein content is 2-20-50-3. ANN model using tansig activation function and trainbr learning function produces MSE training of 0.0097 and validation of 0.0399, and also the R^2 of training and validation are 0.9947 and 0.9774 respectively. This model might be useful for developing an instrument for rapid protein analysis of wheat flour.

References

- [1] Chang YH. Effects of extrusion and baking processes on ginsenosides in wheat flour-ginseng powder blends. ProQuest. 2008.
- [2] Barak S, Mudgil D, Khatkar BS. Relationship of gliadin and glutenin proteins with dough rheology, flour pasting and bread making performance of wheat varieties. *LWT-Food Sci Technol* 2013; 51(1): 211-217.
- [3] Kamizake NKK, Gonçalves MM, Zaia CTBV, Zaia DAM. Determination of total proteins in cow milk powder samples: a comparative study between the Kjeldahl method and spectrophotometric methods. *J Food Compos Anal* 2003; 16(4): 507-516.
- [4] Nielsen SS. Food Analysis Laboratory Manual. *Food Science Text Series*. Springer US, 2003.
- [5] Mutlu AC, Boyaci IH, Genis HE, Ozturk R, Basaran-Akgul N, Sanal T, Evlice AK. Prediction of wheat quality parameters using near-infrared spectroscopy and artificial neural networks. *Eur Food Res Technol* 2011; 233(2): 267-274.

- [6] Naderi-Boldaji M, Fazeliyan-Dehkordi M, Mireei SA, Ghasemi-Varnamkhasti M. Dielectric power spectroscopy as a potential technique for the non-destructive measurement of sugar concentration in sugarcane. *Biosyst Eng.* 2015; 140: 1-10.
- [7] Sucipto S, Niami M, Hendrawan Y, Al-Riza D, Yuliatun S, Supriyanto S, Somantri AS. Prediction of water content, sucrose and invert sugar of sugarcane using bioelectrical properties and artificial neural network. *Int Food Res J.* 2018; 25(6): 2674-2680.
- [8] Sucipto S, Utomo RW, Al-Riza DF, Yuliatun S, Supriyanto S, Somantri AS. Modeling sugar recovery prediction using bioelectrical properties and artificial neural network (in Indonesia Pendugaan rendemen tebu menggunakan sifat biolistrik dan ANN untuk pengembangan alat ukur cepat rendemen tebu). *Jurnal Teknologi Informasi dan Ilmu Komputer* 2018; 5(3): 315-324.
- [9] Widyastuti E, Claudia R, Estiasih T, Ningtyas DW. Characteristics of biscuit from sweet potato (*Ipomoea batatas L.*), fermented corn (*Zea mays*) flour, and egg yolk concentration (in Indonesia Karakteristik biskuit berbasis tepung ubi jalar oranye (*Ipomoea batatas L.*), tepung jagung (*Zea mays*) fermentasi, dan konsentrasi kuning telur). *Jurnal Teknologi Pertanian* 2015; 16(1)
- [10] Juansah J, Budiastira IW, Dahlan K, Seminar KB. Electrical properties of Garut citrus fruits at low alternating current signal and its correlation with physicochemical properties during maturation. *Int J Food Prop* 2014; 17(7): 1498-1517.
- [11] Guo W, Tiwari G, Tang J, Wang S. Frequency, moisture and temperature-dependent dielectric properties of chickpea flour. *Biosyst Eng* 2008; 101(2): 217-224.
- [12] Guo W, Wang S, Tiwari G, Johnson JA, Tang J. Temperature and moisture dependent dielectric properties of legume flour associated with dielectric heating. *LWT-Food Sci Technol* 2010; 43(2): 193-201.
- [13] Sucipto, Djatna T, Irzaman, Irawadi TT, Fauzi AM. Application of electrical properties to differentiate lard from tallow and palm oil. *Media Peternak* 2013; 36(1):32-39.
- [14] Sairin MA, Nizar NNA, Aziz SA, Hashim DM, Rokhani FZ. Potential of dielectric spectroscopy measurement for lard detection. In: *9th Int Conf Sens Technol (ICST) 2015: 722-727.*
- [15] Torrecilla JS, Otero L, Sanz PD. A neural network approach for thermal/ pressure food processing. *J Food Eng.* 2004; 62(1): 89-95.
- [16] Soltani M, Omid M. Detection of poultry egg freshness by dielectric spectroscopy and machine learning techniques. *LWT-Food Sci Technol.* 2015; 62(2): 1034-1042.
- [17] APTINDO. Buku Putih atas Tindakan Anti-Dumping Terhadap Importasi Tepung Gandum (H.S.1101.00.10), <http://aptindo.or.id/2016/10/28/buku-putih-aptindo/> (2016, accessed November 24, 2016).
- [18] Sugiono S, Soenoko R, Lukodono RP. A designing dairy cattle facilities based on statics/ dynamic zoometry by using artificial intelligence. *TELKOMNIKA Telecommunication, Computing, Electronics and Control.* 2017; 15(1): 399-406.
- [19] Hendrawan Y, Murase H. Neural-genetic algorithm as feature selection technique for determining sunagoke moss water content. *Eng Agric Environ Food.* 2010; 3(1): 25-31.
- [20] Nelson SO. Dielectric properties of agricultural products-measurements and applications. *IEEE Trans Dielectr Electr Insul.* 1991; 26(5): 845-869.
- [21] Nelson SO, Trabelsi S. Factors influencing the dielectric properties of agricultural and food products. *The Journal of microwave power and electromagnetic energy : a publication of the International Microwave Power Institute.* 2012; 46(2): 93-107.
- [22] Kraft J. Industrial electronics N3. Cape Town: Maskew Miller Longman. 2000.
- [23] Özkan C, Kun, Erbek FS. The comparison of activation functions for multispectral landsat TM image classification. *Photogramm Eng Remote Sens.* 2003; 69(11): 1225-1234.
- [24] Zhang G, Eddy Patuwu B, Y Hu M. Forecasting with artificial neural networks: The state of the art. *Int J Forecast.* 1998; 14(1): 35-62.
- [25] Elfadl E, Reinbrecht C, Clauplein W. Development of near infrared reflectance spectroscopy (NIRS) calibration model for estimation of oil content in a worldwide safflower germplasm collection. *Int J Plant Prod.* 2012; 4(4): 259-270.
- [26] Ushada M, Okayama T, Suyantohadi A. Artificial neural network model for affective environmental control system in food SMEs. *TELKOMNIKA Telecommunication, Computing, Electronics and Control.* 2018; 16(3): 1317-1323.